

# TRACTOR 4230

Tractor 4230 has got the farmer's confidence for its versatility and robustness, characteristics that meet the needs of small producers, with low maintenance and operation costs.



**AGRALE**

[www.agrale.com.br](http://www.agrale.com.br)  
@f agraleSA

- Robust and Economic
- Ideal for use in small properties




# TRACTOR 4230

Generated on 17/07/2022 11:58:16

ENGINE	
Brand / model	AGRALE M 790
No. of Cylinders	2 / 1270 cm
Aspiration	Natural
Power	30 CV (22 KW) @ 3.000 rpm (NBR ISO 1585)
Maximum Power in PTO	22,5 cv (19,8 kW) @ 3.000 rpm
Maximum Torque	6,9 daNm - 7,0 kgf.m @ 2.550 rpm
DRIVING TRANSMISSION	
Type	Mecanic
No. of Gears	6 Front/ 2 Forward
Differential lock	Mechanical foot pedal and automatic disengaging
Front axle	Oscilante regulável / Diferencial central
CLUTCH	
Type	Simple dry disc
Drive	Mechanical
POWER TAKEOFF	
Drive	Mecanic
Type / drive	Independent
Nominal Speed	540 @ 2.480 engine rpm
HYDRAULIC SYSTEM	
Pressure	120 kgf/cm
Maximum Flow	33 L/min @ 3.000 engine rpm
Remote control	(Optional) 2 way single command
Hitch	3 Points - Category I
Lift capacity	650 kg @ 610 mm behind lift point

BRAKES	
Service Brake	8 Wet discs oil bath
Parking Brake	Manual Lever
STEERING WHEEL	
Type	Hydrostatic
WHEELSETS	
Standard Front Tires	6.00 16" / 7.50 15"
Standard Rear Tires	12.4 24" / 9.5 24"
ELECTRIC SYSTEM	
Battery	12V 55 A.h
Alternator	14V 55 A
CAPACITIES	
Fuel Tank	39 L
DIMENSIONS	
Height	2226 mm
Front gauge	1.000 mm/1.120 mm
Rear Tread	1.088 mm / 1.200 mm
Length	3215 mm
Width	1415 mm / 1350 mm
WEIGHTS	
Shipping weight	1500 kg / 1630 kg
Operating weight (curb weight)	1825 kg / 1905 kg
OPTIONAL ITEMS	
Simple hydraulic control, rear wheels weights.	

## STANDARD 6X2 (MOTOR A 3000RPM - PNEUS STANDARD)

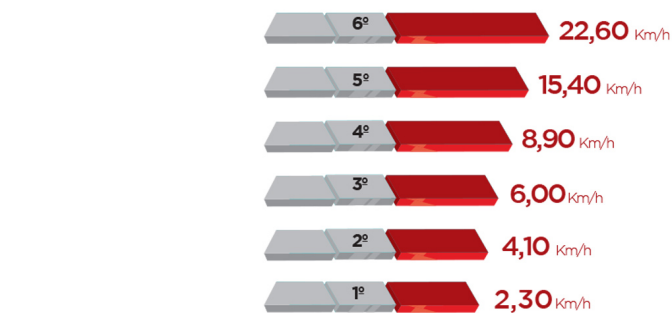

-10,10 km/h 2º R

-2,70 km/h 1º R



VELOCIDADES (KM/H)

